


## 8-Port 10/100TX 802.3at PoE + 2-Port Gigabit TP/SFP Combo Managed Ethernet Switch




PLANET's newly-revised FGSD-1008HPS Layer 2 PoE+ Managed Switch is designed for enterprises and industries where a network of PDs can be centrally managed. The Switch's management functions have been enhanced to include intelligent PoE management, IPv6 management, ACL, GVRP, and more.

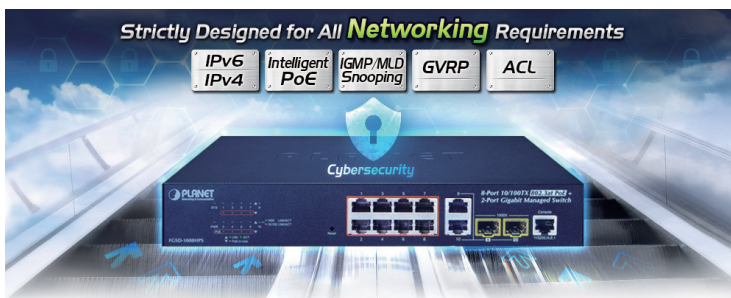

### Cost-optimized Managed PoE+ Switch with L2/L4 Switching and Security

PLANET FGSD-1008HPS is an ideal Managed PoE+ Switch which provides cost-effective advantage to local area network and is widely accepted in the SMB office network. It offers **intelligent Layer 2 data packet switching and management functions, friendly web user interface and stable operation**. The model complies with **IEEE 802.3at Power over Ethernet Plus (PoE+)** at an affordable price; the FGSD-1008HPS is equipped with **8 10/100BASE-TX Fast Ethernet ports** and **2 Gigabit TP/SFP combo** interfaces with inner power system. With its **8 Fast Ethernet ports** integrated with 802.3at PoE+ injector function and total power budget of up to **120 watts**, it offers a rack-mountable, affordable, safe and reliable power solution for SMBs deploying Power over Ethernet networks, or requiring enhanced data security and network traffic management.

#### FGSD-1008HPS

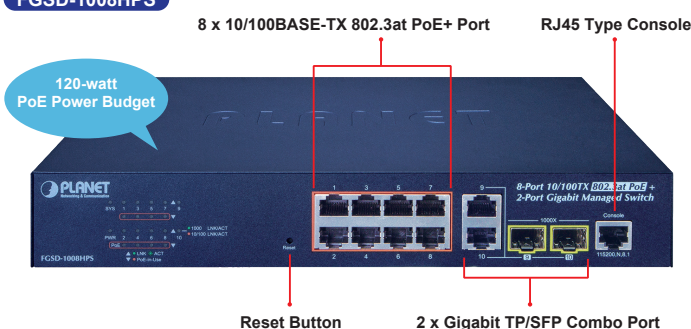

### Physical Port

- **8 10/100BASE-TX** RJ45 copper ports with **IEEE 802.3at/af PoE+** injector function
- **2 10/100/1000BASE-T** Gigabit RJ45 copper ports
- **2 100/1000BASE-X mini-GBIC/SFP slots**, shared with port-9 to port-10
- Reset button for system factory default

### Switching

- Hardware-based 10/100Mbps, half/full duplex and 1000Mbps full duplex mode, flow control and auto-negotiation, and auto MDI/MDI-X
- Features Store-and-Forward mode with wire-speed filtering and forwarding rates
- IEEE 802.3x flow control for full duplex operation and back pressure for half duplex operation
- Automatic address learning and address aging
- Supports CSMA/CD protocol

### Power over Ethernet


- Complies with IEEE 802.3at Power over Ethernet Plus
- Backward compatible with IEEE 802.3af Power over Ethernet
- Up to 8 ports of IEEE 802.3af/802.3at devices powered
- Supports PoE Power up to 30 watts for each PoE port
- 120-watt PoE budget
- Auto detects powered device (PD)
- Circuit protection prevents power interference between ports
- Remote power feeding up to 250m via extend mode
- PoE Management
  - Per port PoE function enable/disable
  - Per Port PoE operation mode selection
  - Per PoE port power budget control
  - PD classification detection and PoE consumption usage status
- Intelligent PoE features
  - PD alive check
  - PoE port sequence
  - PoE schedule

### Layer 2 Features

- Prevents packet loss with back pressure (half-duplex) and IEEE 802.3x pause frame flow control (full-duplex)

### Solution for IPv6 Networking

With the support for IPv6/IPv4 protocol, and easy and friendly management interfaces, the FGSD-1008HPS is the ideal choice for IP surveillance, VoIP and wireless service providers to connect with the IPv6 network. It also helps SMBs to step in the IPv6 era with the lowest investment and without having to replace the network facilities even though ISPs establish the IPv6 FTTx edge network.

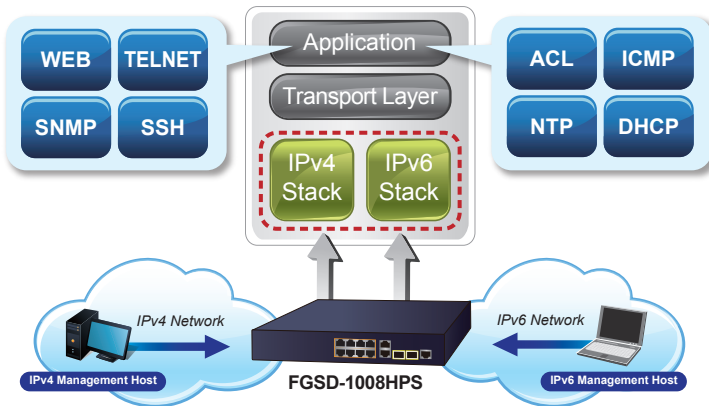


### Built-in Unique PoE Functions for Surveillance Management

As a managed PoE Switch for surveillance network, the FGSD-1008HPS features the following intelligent PoE management functions:

- PD Alive Check
- PoE Port Sequence
- PoE Schedule

### Intelligent Powered Device Alive Check

The FGSD-1008HPS can be configured to monitor a connected PD status in real time via ping action. Once the PD stops working and it is without response, the FGSD-1008HPS will resume the PoE port power and bring the PD back to work. It will greatly enhance the network reliability through the PoE port resetting the PD's power source, thus reducing administrator management burden.

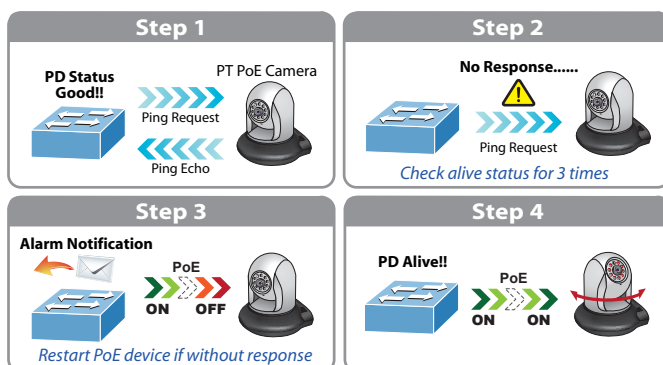

### PoE Port Sequence

To prevent all the PoE ports of the FGSD-1008HPS from being active at the same time when the Switch has booted up, the PoE ports of the FGSD-1008HPS can be configured to allow each port to be activated at an interval time. In addition, the "Delay" setting is to delay power feeding on each port when the FGSD-1008HPS has completely booted up.

- High performance Store and Forward architecture, runt/ CRC filtering eliminates erroneous packets to optimize the network bandwidth
- Supports **VLAN**
  - Port-based VLAN, up to 10 VLAN groups
  - IEEE 802.1Q tagged VLAN
  - Protocol VLAN
  - Provider Bridging (VLAN Q-in-Q) support (IEEE 802.1ad)
  - GVRP
  - Voice VLAN
- Supports **Spanning Tree Protocol**
  - STP (IEEE 802.1D Spanning Tree Protocol)
  - RSTP (IEEE 802.1w Rapid Spanning Tree Protocol)
  - MSTP (IEEE 802.1s Multiple Spanning Tree Protocol)
  - STP BPDU filtering, BPDU Guard
- Supports **Link Aggregation**
  - IEEE 802.3ad Link Aggregation Control Protocol (LACP)
  - 1 LACP group, up to 2 ports per LACP group
  - Cisco ether-channel (static trunk)
  - 1 trunk group, up to 2 ports per trunk group
- Provides port mirror (many-to-1)
- Loop detection

### Quality of Service

- Ingress/Egress Rate Limit per port bandwidth control
- Storm Control support
  - Broadcast/ Multicast /DLF (Destination Lookup Fail)/ARP/ ICMP
- Traffic classification
  - IEEE 802.1p QoS/CoS
  - TCP/UDP/DSCP/IP precedence of IPv4/IPv6 packets
- Strict priority and Weighted Round Robin (WRR) CoS policies

### Multicast


- Supports IPv4 IGMP snooping v1/ v2 and v3
- Supports IPv6 MLD snooping v1, v2

### Security

- Access Control List
  - IPv4/IPv6 IP-based ACL
  - MAC-based ACL
- Port-MAC-IP Address Binding
  - Port-MAC-IP Port Setting
  - Port-MAC-IP Entry Setting
- MAC Address Binding
  - Static MAC
  - MAC Filtering
- DHCP snooping to filter distrusted DHCP messages

### PoE Schedule for Energy Saving

Besides being used for IP surveillance, the FGSD-1008HPS is certainly applicable to build any PoE network including VoIP and wireless LAN. Under the trend of energy saving worldwide and contributing to the environmental protection on the Earth, the FGSD-1008HPS can effectively control the power supply besides its capability of giving high watts power. The “**PoE schedule**” function helps you to enable or disable PoE power feeding for each PoE port during specified time intervals and it is a powerful function to help SMBs and enterprises save energy and budget.

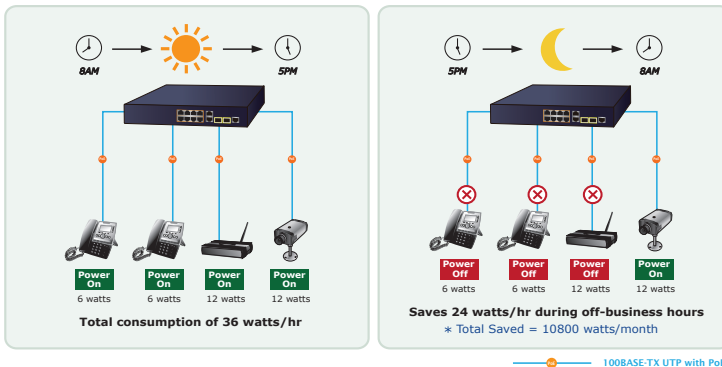


- ARP Inspection discards ARP packets with invalid MAC address to IP address binding

### Management

- IPv4 and IPv6 dual stack management
- Switch management interface
  - Web switch management
  - Telnet command line interface
  - SNMP v1, v2c and v3
- BOOTP and DHCP for IP address assignment
- System maintenance
  - Firmware upgrade via HTTP
  - Configuration upload/download through web interface
  - Hardware-based reset button for system reset to factory default
- SNTP Network Time Protocol
- Link Layer Discovery Protocol (LLDP)
- Event message logging to remote Syslog server
- PLANET Smart Discovery utility


### Ethernet Data Transmission Distance Extension

In the “Extended” operation mode, the FGSD-1008HPS operates on a per-port basis at 10Mbps duplex operation but can support PoE power output over a distance of up to 250 meters overcoming the 100 meters limit on Ethernet UTP cable.

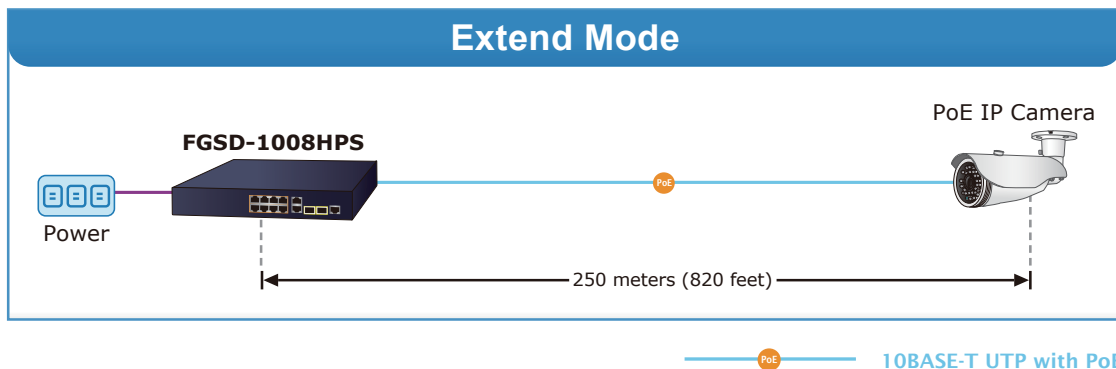

### Robust Layer 2 Features

The FGSD-1008HPS can be programmed for advanced switch management functions, such as **Multiple Spanning Tree Protocol (MSTP)**, BPDU filtering, BPDU Guard, dynamic port link aggregation, **IGMP/MLD snooping**, DHCP relay agent, loop detection and GVRP, voice VLAN and the **Link Layer Discovery Protocol (LLDP)**. The Layer 2 protocol included is to help discover basic information about neighboring devices in the local broadcast domain. Other features included are the port-based/802.1Q VLAN and Q-in-Q VLAN, Layer 2/4 QoS, port mirroring, broadcast storm control and bandwidth control.

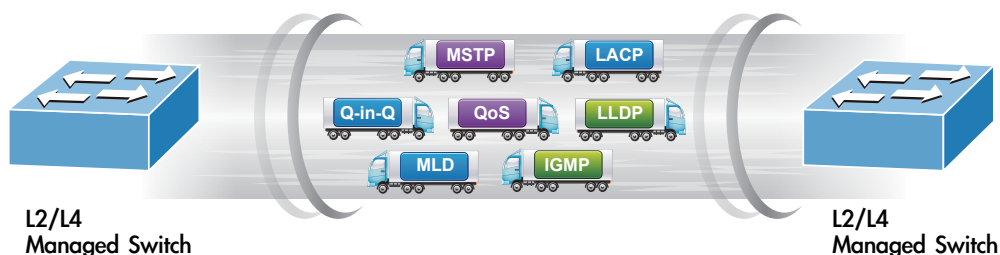

### Enhanced Security and Traffic Control

The FGSD-1008HPS offers the comprehensive **Layer 2 to Layer 4 access control list (ACL)** for enforcing security to the edge. It can be used to restrict network access by denying packets based on source and destination IP/MAC address or defined typical network applications. The FGSD-1008HPS also provides **DHCP Snooping**, **ARP Inspection** and **MAC Verification** functions to prevent IP snooping from attack and discard ARP packets with invalid MAC address. Also included are per port MAC/IP address binding and MAC address binding. The network administrator can now build highly-secure corporate networks with considerably less time and effort than before.

### Cybersecurity Network Solution to Minimize Security Risks

The cybersecurity features that virtually need no effort and cost to have included the protection of the switch management and the enhanced security of the mission-critical network. Both SSH and TLS protocols are utilized to provide strong protection against advanced threats. The network administrator can now construct highly-secure corporate networks with considerably less time and effort than before.

### Efficient Management

For efficient management, the FGSD-1008HPS is equipped with **Web**, **Telnet** and **SNMP** management interfaces. With the built-in Web-based management interface, the FGSD-1008HPS offers an easy-to-use, platform-independent management and configuration facility. By supporting the standard Simple Network Management Protocol (SNMP), the FGSD-1008HPS can be managed via any standard management software. For text-based management, the switch can be accessed via Telnet. Moreover, the FGSD-1008HPS offers secure remote management by supporting **SNMPv3** connections which encrypt the packet content at each session.




### Flexible and Extendable Uplink Solution

The FGSD-1008HPS provides **2 extra Gigabit TP/SFP combo** interfaces supporting **10/100/1000BASE-T** RJ45 copper to connect with surveillance network devices such as **NVR**, **Video Streaming Server** or **NAS** to facilitate surveillance management. Or through these fiber SFP slots occupied by the 1000BASE-SX/LX SFP (small form-factor pluggable) fiber transceivers, it can be uplinked to a backbone switch and monitoring center in long distance. The distance can be extended from 550 meters to 2km (multi-mode fiber) to 10/20/40/80/120 kilometers (single-mode fiber or WDM fiber). They are well-suited for applications within the industrial data centers and distributions.

## Applications

### PDs are Centrally Managed


Providing 8 10/100BASE-TX PoE+ ports, in-line power interfaces and two Gigabit TP/SFP combo interfaces, the FGSD-1008HPS can easily build an IP camera system for the enterprises where its power is centrally controlled. It can work with one 8-channel NVR to perform comprehensive security monitoring with 8 IP cameras via one Gigabit TP/SFP combo port. The FGSD-1008HPS comes with non-blocking design, desktop size and SFP fiber-optic modules, bringing flexibility to building a network infrastructure at a low cost.

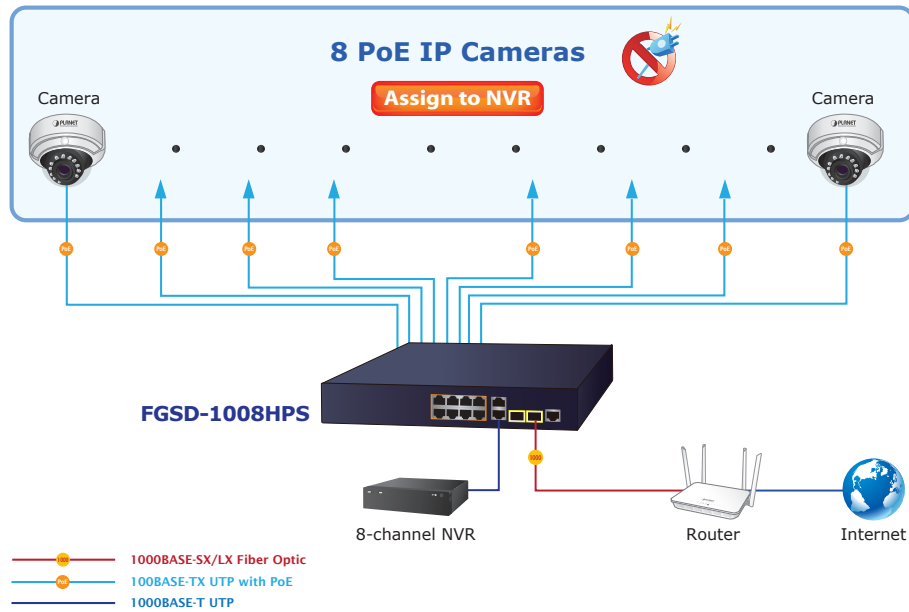

### High-performance PoE Network Connectivity

All of its ports are 802.3af/at compliant, thus making high-performance Fast Ethernet network connectivity with PoE IP telephones, PoE IP cameras, PoE wireless access points and other devices possible, all at reasonable costs. The FGSD-1008HPS improves the network efficiency and protects the network clients with its following powerful features:

- Layer 2 to Layer 4 security
- QoS, 802.1Q VLAN, static trunk, LACP
- Multicast IGMP snooping

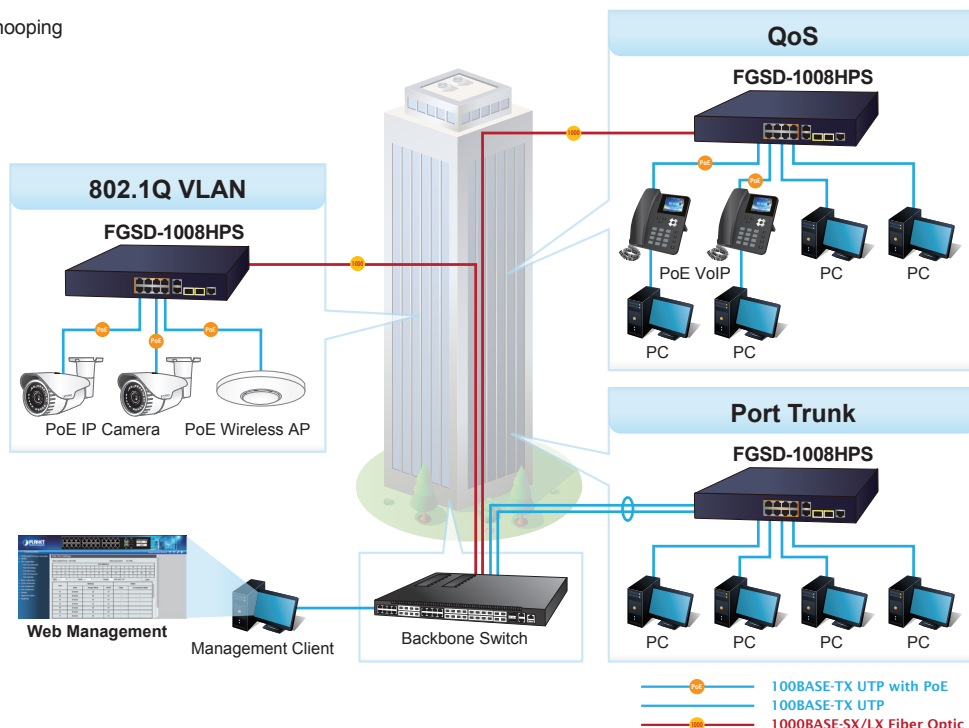

## Specifications

Product	FGSD-1008HPS
<b>Hardware Specifications</b>	
Copper Ports	8 10/100BASE-TX RJ45 Auto-MDI/MDI-X ports
PoE Injector Port	8 802.3af/802.3at PoE+ injector ports
Gigabit Copper Ports	2 10/100/1000BASE-T RJ45 auto-MDI/MDI-X ports
SFP/mini-GBIC Slots	2 100/1000BASE-X SFP interfaces, shared with Port-9 to Port-10
Console	1 RS232-to-RJ45 serial port (115200, N, 8, 1)
Reset Button	< 5 sec: System reboot > 5 sec: Factory default
LED	System: Power (Green) SYS (Green) 10/100TX RJ45 Interfaces (Port 1 to Port 8): LNK/ACT (Green), PoE-in-Use (Amber) 10/100/1000BASE-T RJ45 / SFP Interfaces (Port 9 to Port 10): LNK/ACT 10/100 (Amber), 1000 (Green)
Thermal Fan	1
Power Requirements	100~240V AC, 50/60Hz, 2.5A (max.)
Power Consumption/Dissipation	Max.121watts/413BTU
Dimensions (W x D x H)	280 x 180 x 44 mm
Weight	1503g
Enclosure	Metal
<b>Switching</b>	
Switch Architecture	Store-and-Forward
Switch Fabric	5.5Gbps/non-blocking
Switch Throughput@64bytes	4.17Mpps @64bytes
MAC Address Table	16K entries
Shared Data Buffer	4Mbits
Flow Control	IEEE 802.3x pause frame for full duplex Back pressure for half duplex
Jumbo Frame	16K bytes
<b>Power over Ethernet</b>	
PoE Standard	IEEE 802.3af Power over Ethernet/PSE IEEE 802.3at Power over Ethernet Plus/PSE
PoE Power Supply Type	End-span
Power Pin Assignment	1/2(+), 3/6 (-)
PoE Power Output	Per Port 53V DC, 300mA. Max. 15.4 watts (IEEE 802.3af) Per Port 53V DC, 600mA. Max. 30 watts (IEEE 802.3at)
PoE Power Budget	120 watts
Number of PDs, 7 watts	8
Number of PDs, 15.4 watts	7
Number of PDs, 30 watts	4
<b>Layer 2 Functions</b>	
Port Mirroring	TX/RX/both Many-to-1 monitor
VLAN	Port-based VLAN, up to 10 VLAN groups IEEE 802.1Q tagged VLAN - Up to 256 VLAN groups, out of 4094 VLAN IDs Protocol VLAN Provider Bridging (VLAN Q-in-Q) support (IEEE 802.1ad) GVRP Voice VLAN
Link Aggregation	IEEE 802.3ad LACP supports one 2-port trunk group; static trunk supports one 2-port trunk group
Spanning Tree Protocol	IEEE 802.1D Spanning Tree Protocol (STP) IEEE 802.1w Rapid Spanning Tree Protocol (RSTP) IEEE 802.1s Multiple Spanning Tree Protocol (MSTP) STP BPDU filtering, BPDU Guard
IGMP Snooping	IPv4 IGMP snooping v1/ v2 and v3
MLD Snooping	IPv6 MLD snooping v1, v2

QoS	Ingress/Egress Rate Limit per port bandwidth control - Storm Control support Broadcast/ Multicast /DLF (Destination Lookup Failure)/ARP/ICMP Traffic classification - IEEE 802.1p Qos/CoS - TCP/UDP/DSCP/IP precedence of IPv4/IPv6 packets Strict priority and Weighted Round Robin (WRR) CoS policies
<b>Security Functions</b>	
Access Control List	IPv4/IPv6 IP-based ACL MAC-based ACL
MAC Security	Port-MAC-IP Address Binding - Port-MAC-IP Port Setting - Port-MAC-IP Entry Setting MAC Address Binding - Static MAC - MAC Filtering
Enhanced Security	DHCP snooping to filter distrusted DHCP messages ARP Inspection discards ARP packets with invalid MAC address to IP address binding
<b>Management Functions</b>	
System Configuration	Console and Telnet command line interface Web browser SNMP v1, v2c
Secure Management Interfaces	SNMP v3, SSH v2, TLS v1.2
System Management	IPv4 and IPv6 dual stack management BOOTP and DHCP for IP address assignment System maintenance - Firmware upgrade via HTTP - Configuration upload/download through web interface - Hardware-based reset button for system reset to factory default SNTP Network Time Protocol Link Layer Discovery Protocol (LLDP) PLANET smart discovery utility
Event Management	Event message logging to remote Syslog server
<b>Standards Conformance</b>	
Regulatory Compliance	FCC Part 15 Class A, CE
Standards Compliance	IEEE 802.3 10BASE-T IEEE 802.3u 100BASE-TX IEEE 802.3z Gigabit SX/LX IEEE 802.3ab Gigabit 1000T IEEE 802.3x flow control and back pressure IEEE 802.3ad port trunk with LACP IEEE 802.1D Spanning Tree Protocol IEEE 802.1w Rapid Spanning Tree Protocol IEEE 802.1s Multiple Spanning Tree Protocol IEEE 802.1p Class of Service IEEE 802.1Q VLAN tagging IEEE 802.1ab LLDP IEEE 802.3af Power over Ethernet IEEE 802.3at Power over Ethernet Plus RFC 2068 HTTP RFC 1112 IGMP version 1 RFC 2236 IGMP version 2 RFC 3376 IGMP version 3 RFC 2710 MLD version 1 RFC 3810 MLD version 2
<b>Environment</b>	
Operating	Temperature: 0 ~ 50 degrees C Relative Humidity: 10 ~ 90% (non-condensing)
Storage	Temperature: -10 ~ 70 degrees C Relative Humidity: 5 ~ 90% (non-condensing)

## Ordering Information

FGSD-1008HPS	8-Port 10/100TX 802.3at PoE + 2-Port Gigabit TP/SFP Combo Managed Ethernet Switch
--------------	---

## Related Products

FGSW-1816HPS	16-Port 10/100TX 802.3at PoE + 2-Port Gigabit TP/SFP Combo Managed Ethernet Switch
FGSW-2624HPS	24-Port 10/100TX 802.3at PoE + 2-Port Gigabit TP/SFP Combo Managed Ethernet Switch
FGSW-2624HPS4	24-Port 10/100TX 802.3at PoE + 2-Port Gigabit TP/SFP Combo Managed Ethernet Switch
ICA-3280	H.265 1080p Smart IR Bullet IP Camera
ICA-4280	H.265 1080p Smart IR Dome IP Camera
ICA-M3580P	H.265 5 Mega-pixel Smart IR Bullet IP Camera with Remote Focus and Zoom
ICA-M4580P	H.265 5 Mega-pixel Smart IR Dome IP Camera with Remote Focus and Zoom
ICA-A3280	H.265 1080p Smart IR Bullet IP Camera with Artificial Intelligence
ICA-A4280	H.265 1080p Smart IR Dome IP Camera with Artificial Intelligence
POE-E201	IEEE 802.3at Power over Ethernet Extender
WDAP-C7210E	1200Mbps 802.11ac Wave 2 MU-MIMO Dual Band Ceiling-mount Wireless Access Point
ICF-1900	High Definition Touch Color Screen Smart Media Android SIP Conference Phone

## Available 1000Mbps Modules

MGB-GT	SFP-Port 1000BASE-T Module
MGB-SX	SFP-Port 1000BASE-SX mini-GBIC module - 550m
MGB-SX2	SFP-Port 1000BASE-SX mini-GBIC module - 2km
MGB-LX	SFP-Port 1000BASE-LX mini-GBIC module - 20km
MGB-L40	SFP-Port 1000BASE-LX mini-GBIC module - 40km
MGB-L80	SFP-Port 1000BASE-LX mini-GBIC module - 80km
MGB-L120	SFP-Port 1000BASE-LX mini-GBIC module - 120km
MGB-LA10	SFP-Port 1000BASE-LX (WDM,TX:1310nm) mini-GBIC module - 10km
MGB-LB10	SFP-Port 1000BASE-LX (WDM,TX:1550nm) mini-GBIC module - 10km
MGB-LA20	SFP-Port 1000BASE-LX (WDM,TX:1310nm) mini-GBIC module - 20km
MGB-LB20	SFP-Port 1000BASE-LX (WDM,TX:1550nm) mini-GBIC module - 20km
MGB-LA40	SFP-Port 1000BASE-LX (WDM,TX:1310nm) mini-GBIC module - 40km
MGB-LB40	SFP-Port 1000BASE-LX (WDM,TX:1550nm) mini-GBIC module - 40km
MGB-LA80	SFP-Port 1000BASE-LX (WDM,TX:1490nm) mini-GBIC module - 80km
MGB-LB80	SFP-Port 1000BASE-LX (WDM,TX:1550nm) mini-GBIC module - 80km