

Universal Network Management Controller with LCD Touch Screen



Universal Network Management Controller with LCD Touch Screen

PLANET's NMS-1000V-12 Network Management controller can directly monitor all kinds of deployed network devices without having to use an extra computer. However, the deployed devices, such as managed switches, media converters, routers, smart APs, VoIP phones, IP cameras, etc., have to be compliant with the **SNMP** Protocol, **ONVIF** Protocol and **PLANET Smart Discovery** utility. It thus enables the administrator to centrally manage a network of **up to 1024** nodes from a central office, greatly boosting network and power management efficiency. Through the intuitive touch panel, any network exception messages can be displayed in real time to greatly improve the work efficiency of network management personnel. With its user authentication management, the NMS-1000V-12 enhances data transmission security in the modern factory automation systems.



Watch Over Network within Minutes

The domain information web page presents a managed devices list and topology view, providing the at-a-glance and efficient summary of your management network. It lets you have a valuable information on the current wired and wireless network statuses via data-driven graphical charts. The topology viewer and event reports enable you to visualize the system usage and node status in real time so as to address whatever issue they may have.

Industrial-grade Physical Hardware

- 2 x 10/100/1G/2.5GBASE-T Ethernet RJ45 ports
- 2 x USB 3.2 Gen1 Type-A ports (configuration backup and restoration)
- 2 x USB 2.0 Type-A ports (configuration backup and restoration)
- 1 x HDMI interface
- 3 x DB-9 COM1, COM2, COM3 (reserve)
- 1 x 3-pin DC power input terminal
- VESA (100 x 100) panel mount

Network Devices Management

- **Dashboard:** Providing the at-a-glance view of system, device summary, traffic, PoE network status
- **Setup Wizard:** Easy to use step-by-step guidance
- **Node Discovery:** To detect PLANET managed devices available and allow AP grouping to accelerate AP management
- **Auto-Topology Viewer:** A topology of network devices compliant with SNMP, ONVIF, Smart Discovery and LLTD Protocol
- **Event Reports:** The status of a network can be reported via network alarm, system log
- **Alarm System:** Popup alerts and email alerts for the administrator via the SMTP server
- **Batch Provisioning:** Enabling multiple APs to be configured and upgraded at one time by using the designated profile.
- **Coverage Heat Map:** Real-time signal coverage of APs on the user-defined floor map to optimize Wi-Fi field deployment
- **Customized Profile:** Allowing the creation and maintenance of multiple wireless profiles
- **Auto Provision:** Multi-AP provisioning with one click
- **Cluster Management:** Simplifying high-density AP management



Network with Cybersecurity Helps Minimize Security Risks


With the UNC-NMS, the NMS Series comes with enhanced cybersecurity to fend off cyberthreats and cyberattacks. The data transmission supports TLS and SSL protocols to provide strong protection against advanced threats. The cybersecurity feature of the NMS Series protects the network management and enhances the security of the mission-critical network without any extra deployment cost and effort.



User-friendly Setup Wizard

The NMS-1000V-12 enhances user experience by providing more user-friendly wizard and obvious step-by-step guidance on each related function. Just like an app, it reduces training time and allows even non-technical users to be able to set up management network system within minutes.

Wizard Setup

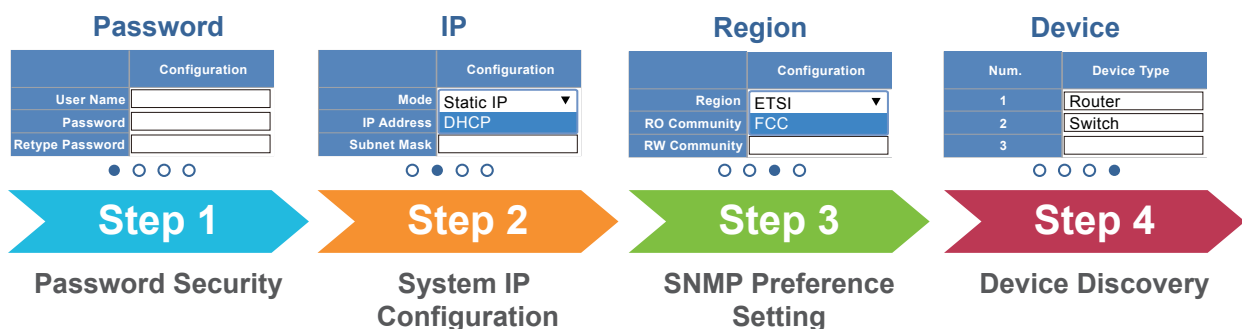

- **Zone Plan:** Optimizing AP deployment with actual signal coverage
- **Authentication:** Built-in RADIUS server seamlessly integrated into the enterprise network
- **User Control:** Allowing on-demand account creation and user-defined access policy
- **Scalability:** Free system upgrade and AP firmware bulk upgrade capability
- **Maximum Scalability:** 50 floor maps, 1024 nodes, 128 AP groups, 128 SSID profiles, 1024 managed APs, 20,000 clients, 20,000 RADIUS user accounts, 50 RADIUS user groups and 1024 RADIUS clients.

Network Management Characteristics

- Built-in DHCP Server
- Built-in RADIUS Server
- SSL secure access
- Web-based GUI management interface
- SNMP v1, v2c, and v3 management
- Supports PLANET DDNS/Easy DDNS

Interactive Dashboard Shows Network Statuses in an Instant

The NMS-1000V-12's interactive dashboard includes local site network router, switch, access point statistics and WAN Traffic/PoE history graph. The administrator can quickly overview the status of device was online or offline. Through alert pop message window he can also find out system event on the touch panel, thus immediately knowing where the disconnection issue comes from.



Real-time Centralized Monitoring with Pop-up Alerts and E-mail Alarm Function

As the NMS-1000V-12 can come out with a topology view of the network of the deployed powered devices, it enables to detect which device is online (Green) or offline (Red). The real-time centralized monitoring of these devices can help the administrator know what the current statuses of these devices are. Pop-up alerts shown on the touch panel tell where the problems are. The e-mail alarm function is designed to send an email alert to the administrator via the SMTP server where syslog information can be found once an abnormality is detected. This can prompt the administrator to quickly fix the identified problem in the network.



Optimizing Wi-Fi Deployment with Floor Maps

With the floor maps, devices can be located according to the field deployment, thus saving your time and cost of on-site support and monitoring. The current statuses of devices are shown in real time and the heat map is able to show the wireless signal coverage and strength to help the administrator fine-tune the overlapping of the adjacent devices anytime to optimize the wireless network performance.



HDMI Screen Synchronization Projection and Remote Login

The NMS-1000V-12 supports HDMI interface that can easily connect to another bigger size screen, so that user can easily monitor the network more clearly. It also can be operated from anywhere via Web browser so as to open more monitor screens for accessing managed nodes in a DHCP-enabled network, thus controlling multiple devices through the other PC, laptop or tablet.





Applications

Economical Central Network Management Solution for SMBs

PLANET NMS-1000V-12 helps service providers and IT managers control all PLANET network devices at the same time and enables administrator to effectively manage a local network of up to 1024 managed nodes simultaneously without having to purchase any license and hardware-based controller, and pay an expensive annual subscription fee.

The administrator can automatically discover and configure device profiles, batch provisioning/firmware upgrade, and built-in SAPC (Smart AP Control) that customizes Wi-Fi planning against floor maps, and monitors all managed APs through a single Web-based interface. It allows operating across different platforms through virtualization software, which helps SMBs save costs on the need to configure the wireless APs one by one if done manually.

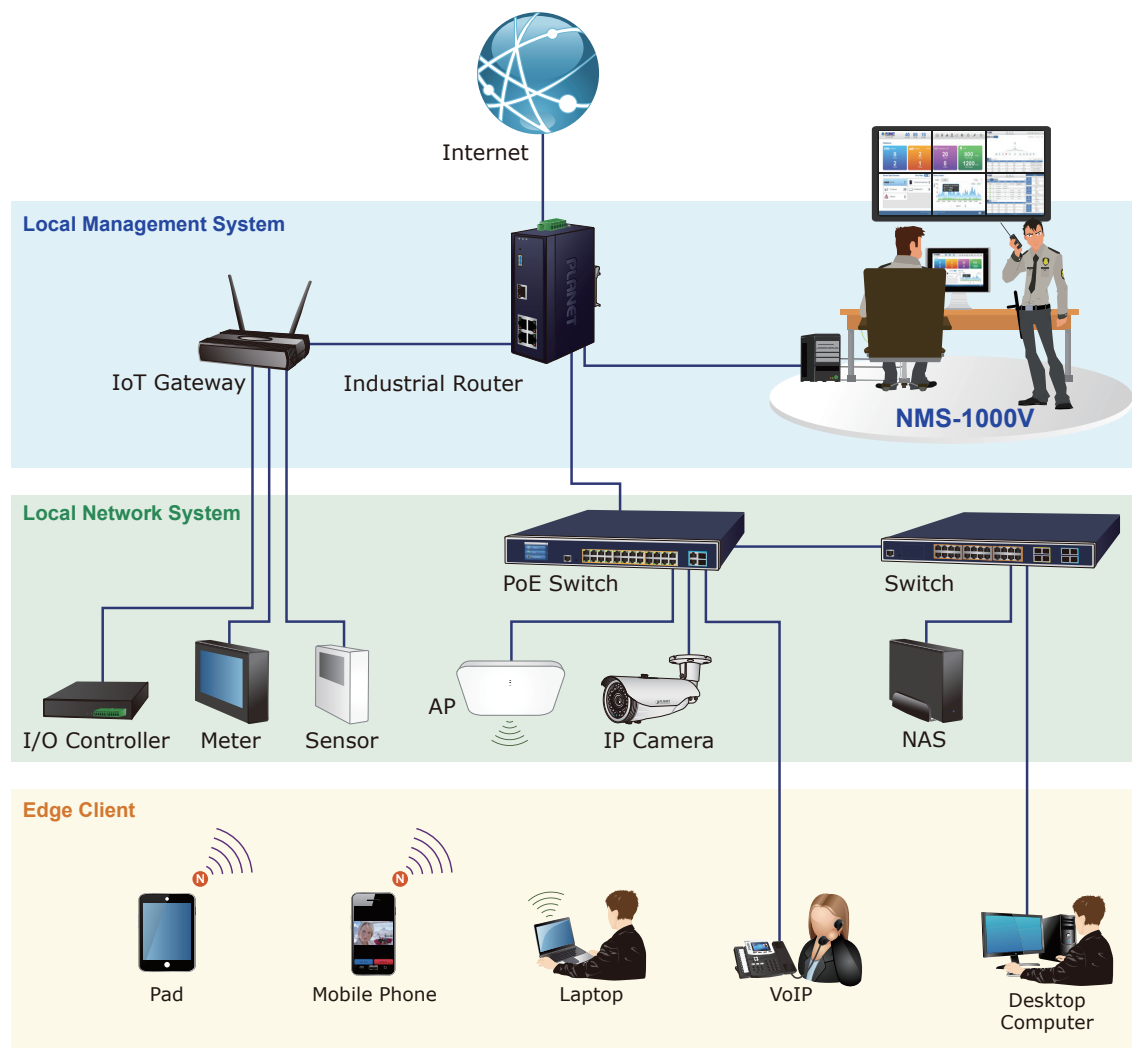

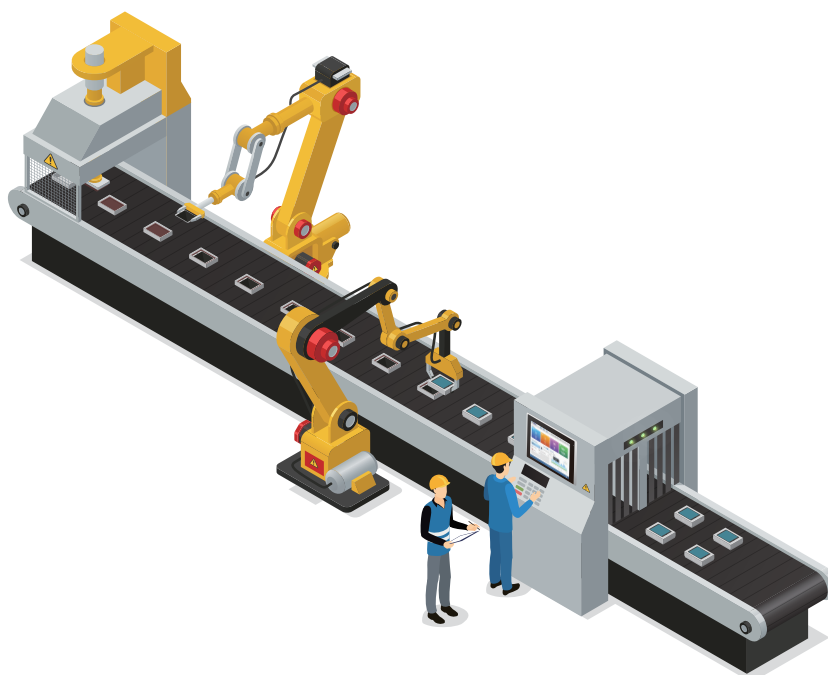

[Remarks]

Router: Log in to the router's Web user interface and **enable the SNMP** function.

Switch: Log in to the switch's Web user interface and **enable the SNMP and LLDP** function.

AP: Log in to the AP's Web user interface to **configure the AP to "Managed AP"**. In support of SNMP AP, **enable the SNMP** function.

IP Cam: The **ONVIF** function is enabled by default.

Specifications

Product	NMS-1000V-12
Hardware Version	V2
Form Factor	Panel Mount, VESA 100 x 100
Physical Specifications	
I/O Interface	2 x 10/100/1G/2.5GBASE-T Ethernet RJ45 ports
	2 x USB 3.2 Gen1 Type-A ports
	2 x USB 2.0 Type-A ports
	1 x HDMI interface
	3 x DB-9 COM1,COM2,COM3 (reserve)
	1 x 3-pin DC power input terminal
Storage	1 x M.2 2280 128G SATA3.0 SSD
Touch LCD Size	12.1" TFT-LCD
Touch Type	Projected Capacitive Touch
Display Resolution	1024 x 768
Display Luminance (cd/m ²)	500
Display Viewing Angle (H°/V°)	178(H)/178(V)
Display Contrast	1000:1
Display Backlight lifetime (hrs)	30,000 hrs
Light Transmission (%)	Projected Capacitive Touch: over 90%
Dimensions (W x D x H)	319 x 244.9 x 77 mm
Weight	3.34 kg
Enclosure	Aluminum die-cast chassis
Power Requirements	DC IN 9~36V
	60W adapter 12V 5A with terminal block
	AC 100~240V, 2.0A, 60~50Hz.
Environment & Certification	
IP rating	IP66 Compliant Front Bezel
Temperature	Operating: -20 ~ 60 degrees C
	Storage: -30 ~ 70 degrees C
Humidity	10 ~ 95% @ 40 degrees C (non-condensing)
MTBF (Hours)	100,000

Network Management		
Number of Managed Devices		1,024
Number of RADIUS Client Devices		1,024
Number of RADIUS User Accounts		20,000
Auto Discovery		Supports PLANET devices
Dashboard		Providing the at-a-glance view of system, device summary, traffic, PoE network status
Device List		Allows creation and maintenance of device profiles
Auto-Topology View		Provides visual topology view of connected PLANET devices
Status Monitoring		Real-time online/offline devices
Event and Syslog Report		Real-time system event and syslog server supported
Event Alarm Define		Allows event alarm item option
SMTP Alarm		E-mail alert to the administrator via the SMTP server
Popup Alert Message Window		Touch screen exclusive alert message window
SSID/RF Profile		Allows creation and maintenance of multiple wireless profiles
Cluster Management		Allows AP grouping for bulk provisioning and batch upgrading
Bulk AP Provisioning		Supports bulk AP provisioning with user-defined profiles
Bulk AP Firmware Upgrade		Supports bulk AP firmware upgrade
Coverage Heat Map		Enables real signal coverage of managed AP reflecting on the uploaded zone maps
Graphical Statistics		Real-time and historical visibility of wireless traffic flow
Backup/Restoration		Provides system and profile backup/restoration
SSIDs-to-VLANs Mapping		Allows to configure SSIDs-to-VLANs mapping in supported APs
RADIUS Authentication		RADIUS server is integrated for client authentication in a large-scale enterprise network
User Account Management		Supports on-demand account creation per user-defined access policy
Secure Management Interfaces		TLS 1.2 w/ UNC-NMS, SSLv3, SNMPv3
Network Services		
Network	DDNS	Supports PLANET DDNS/Easy DDNS
	DHCP	Built-in DHCP Server for auto IP assignment to APs
	Management	Console; Telnet; SSL; Web browser (Chrome is recommended);
	SNMP v1, v2c, v3	Supports SNMP, ONVIF and PLANET Smart Discovery
Maintenance	Backup	System backup and restore to local or USB HDD
	Reboot	Provides system reboot manually or automatically per power schedule
	Diagnostic	Provides IPv4/IPv6 ping and trace route
Standards Conformance		
Regulatory Compliance		CE, FCC Class A
Standards Compliance		IEEE 802.3 10BASE-T
		IEEE 802.3u 100BASE-TX
		IEEE 802.3ab Gigabit 1000BASE-T

Ordering Information

NMS-1000V-12	Universal Network Management Controller with 12" LCD Touch Screen
--------------	---

PLANET Technology Corporation

11F., No.96, Minquan Rd., Xindian Dist., New Taipei City 231,
Taiwan (R.O.C.)

Tel: 886-2-2219-9518

Email: sales@planet.com.tw

Fax: 886-2-2219-9528

www.planet.com.tw



PLANET reserves the right to change specifications without prior notice. All brand names and trademarks are property of their respective owners. Copyright © 2026 PLANET Technology Corp. All rights reserved.

NMS-1000V-12_v2