

5-/8-Port Gigabit Ethernet Switch

GSD-503 / GSD-803



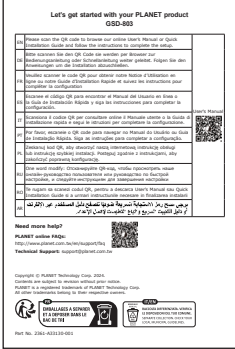
User's Manual

Table of Contents

1. Package Contents	3
2. Product Features.....	4
3. Switch Front Panel	5
4. LED Indicators.....	6
5. Switch Rear Panel.....	7
6. Installing the Switch	8
7. Product Specifications	10
8. Customer Support	12

1. Package Contents

Check the contents of your package for the following parts:

Gigabit Ethernet Switch x 1 (Vary on the model)	5V DC, 1A Power Adapter x 1	QR Code Sheet x 1
		

If any of these are missing or damaged, please contact your dealer immediately; if possible, retain the carton including the original packing material, and use them again to repack the product in case there is a need to return it to us for repair.

2. Product Features

■ RJ45 Interface

- 5/8 10/100/1000Mbps Gigabit Ethernet ports
- Complies with IEEE 802.3, 10BASE-T, IEEE 802.3u 100BASE-TX, IEEE 802.3ab 1000BASE-T
- Supports auto MDI/MDI-X function

■ Switching

- Hardware-based 10/100Mbps, half/full duplex and 1000Mbps full duplex mode, flow control and auto-negotiation
- Features Store-and-Forward mode with wire-speed filtering and forwarding rates
- IEEE 802.3x flow control for full duplex operation and backpressure for half duplex operation
- Integrated address look-up engine, supporting 2K/8K absolute MAC addresses (GSD-503/GSD-803)
- 15K jumbo packet size
- Power saving ability for Green networking
- Automatic address learning and address aging
- Supports CSMA/CD protocol

■ Hardware

- Made from metal, desktop size and wall-mount design
- LED indicators for system power and link/activity status for each 1000 Mbps port
- 5V DC, 1A external power adapter
- FCC, CE Class B compliant

3. Switch Front Panel

Figures 3-1 and 3-2 show the front panels of GSD-503 and GSD-803, respectively.

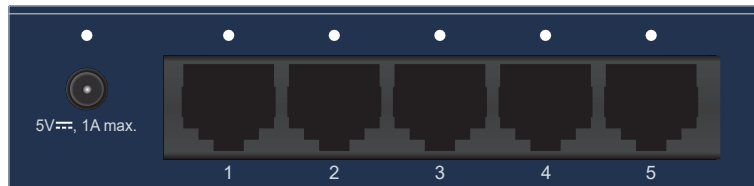


Figure 3-1: GSD-503 Front Panel

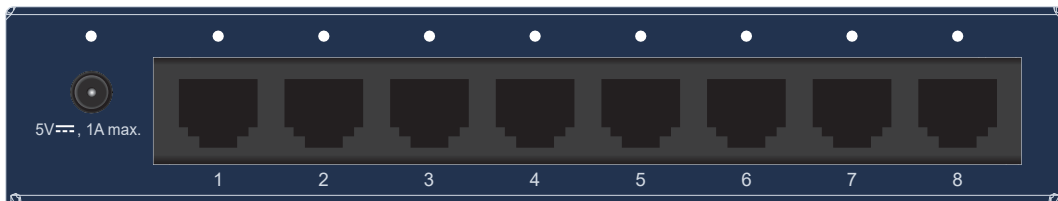


Figure 3-2: GSD-803 Front Panel

4. LED Indicators

■ System

LED	Color	Function	
PWR	Green	Light	Indicates that the Switch is powered ON.
		OFF	Indicates that the Switch is powered OFF.

■ Per 10/100/1000Mbps port

LED	Color	Function	
Link/ ACT	Green	Light	Indicates the link through that port is successfully established at 10/100/1000Mbps.
		Blink	Indicates the Switch is actively sending or receiving data over that port.

5. Switch Rear Panel

Figures 5-1 and 5-2 show the rear panels of GSD-503 and GSD-803, respectively.



Figure 5-1: GSD-503 Rear Panel



Figure 5-2: GSD-803 Rear Panel



Power
Note

1. The device is a power-required device, meaning it will not work till it is powered. If your networks should be active all the time, please consider using UPS (Uninterrupted Power Supply) for your device. It will prevent you from network data loss or network downtime.
2. In some area, installing a surge suppression device may also help to protect your Switch from being damaged by unregulated surge or current to the Switch or the power adapter.

6. Installing the Switch

This part describes how to install your Gigabit Ethernet Switch and make connections to it. Please read the following topics and perform the procedures in the order being presented.



Note

This Switch does not need software configuration.

■ Desktop Installation

To install the Switch on desktop, simply follow the following steps:

Step 1: Place the Switch on the desk near a power source.

Step 2: Keep some ventilation space between the Switch and the surrounding objects.



Note

When choosing a location, please keep in mind the environmental restrictions discussed in Chapter 7 under Product Specifications.


Step 3: Connect your Switch to network devices.

- A.** Connect one end of a standard network cable to the 10/100/1000 RJ45 ports of the Switch.
- B.** Connect the other end of the cable to the network devices such as printer servers, workstations or routers, etc.

Step 4: Supply power to the Switch.

- A.** Connect one end of the power cable to the Switch.
- B.** Connect the 5V DC power adapter to a standard wall outlet.

When the Switch receives power, the Power LED should remain solid Green.

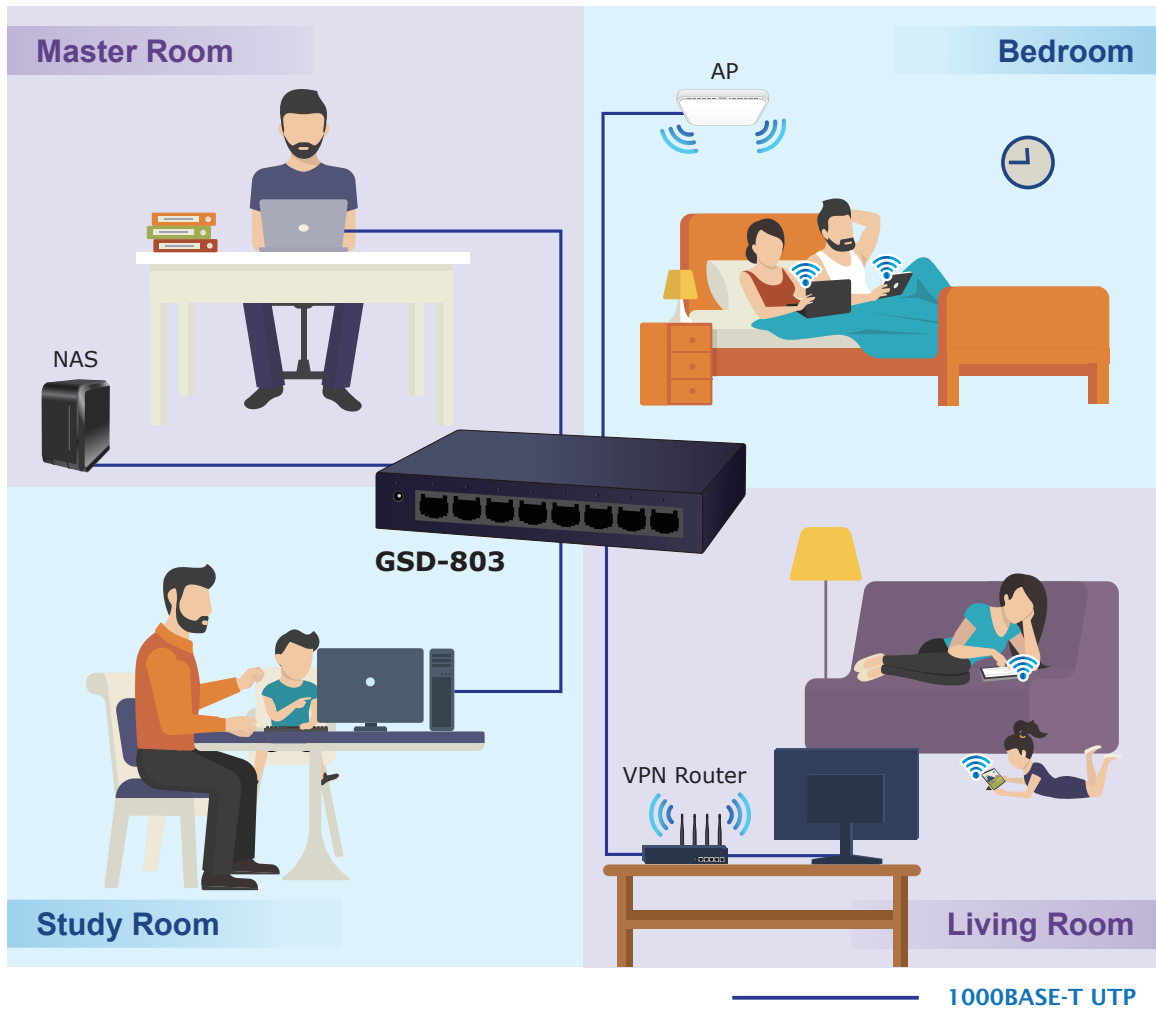

7. Product Specifications

Product	GSD-503	GSD-803
Hardware Specifications		
Hardware Version	9	8
10/100/1000BASE-T Ports	5 auto MDI/MDIX ports	8 auto MDI/MDIX ports
LED Display	One for power and one for Link/Act per port	
Enclosure	metal	
Dimensions (W x D x H)	100 x 64 x 24mm	140 x 67 x 26mm
Weight (g)	145g	221g
Power Requirements (External power adapter)	5V DC, 1A	
Power Consumption/ Dissipation	2.2 watts/7.5 BTU	4.2 watts/14.3 BTU
Switch Specifications		
Switch Processing Scheme	Store-and-Forward	
Address Table	2K	8K
Flow Control	Back pressure half duplex, IEEE 802.3x pause frame full duplex	
Switch Fabric	10Gbps	16Gbps
Throughput (packet per second)	7.44Mpps	11.9Mpps
Jumbo Packet Size	15K	

Standards Conformance	
Standards Compliance	IEEE 802.3 (Ethernet) IEEE 802.3u (Fast Ethernet) IEEE 802.3ab (Gigabit Ethernet) IEEE 802.3x (Full-duplex Flow Control) IEEE 802.3az Energy Efficient Ethernet (EEE)
Regulatory Compliance	FCC Part 15 Class B, CE
Environments	
Operating Temperature	0~50 degrees C
Storage Temperature	-10~70 degrees C
Humidity	Operating: 0~50 degrees C, Storage: 5% to 95% (non-condensing)

8. Customer Support

Thank you for purchasing PLANET products. You can browse our online FAQ resource on PLANET Website first to check if it could solve your issue. If you need more support information, please contact PLANET switch support team.

PLANET online FAQs:

<https://www.planet.com.tw/en/support/faq>

Switch support team mail address:

support@planet.com.tw

Copyright © PLANET Technology Corp. 2024.

Contents are subject to revision without prior notice.

PLANET is a registered trademark of PLANET Technology Corp.

All other trademarks belong to their respective owners.