

10/100/1000BASE-T to 100/1000BASE-X SFP

Managed Media Converter

GT-915A

Quick Installation Guide

Table of Contents

1. Package Contents.....	3
2. Requirements.....	4
3. Starting Web Management	5
3.1 Logging in to the Managed Media Converter.....	6
3.2 Saving Configuration via Web	8
4. Recovering Back to Default Configuration	9
5. Customer Support	10

1. Package Contents

Thank you for purchasing PLANET 10/100/1000BASE-T to 100/1000BASE-X SFP Managed Media Converter, GT-915A. **"Managed Media Converter"** mentioned in this Guide refers to the GT-915A.

Open the box of the Managed Media Converter and carefully unpack it. The box should contain the following items:

GT-915A	
The Managed Media Converter	■
Quick Start QR code sheet	■
DC 5V/2A Power Adapter	■
SFP Dust Cap	1

If any of these are missing or damaged, please contact your dealer immediately. If possible, retain the carton including the original packing materials to enable you to repack the product in case there is a need to return it to us for repair.

2. Requirements

The Managed Media Converter provides remote Web interface for management purposes; the following products are necessary for further management.

- **Workstations** running Windows XP/2003/2008/Vista/7/8/10, MAC OS X or later, Linux, UNIX, or other platforms are compatible with TCP/IP Protocols.
- Workstations are installed with Ethernet NIC (Network Interface Card).
- **Ethernet Port Connection**
 - **Network cables** -- Use standard network (UTP) cables with RJ45 connectors.
 - The above PC is installed with **Web browser**.



Note

It is recommended to use Chrome 98.0.xxx or above to access the Managed Media Converter.




Note

If the Web interface of the Managed Media Converter is not accessible, please turn off the anti-virus software or firewall and then try it again.

3. Starting Web Management

The following shows how to start up the Web Management of the Managed Media Converter. Note the Managed Media Converter is configured through an Ethernet connection. Please make sure the manager PC must be set to the same IP subnet address.

For example, the default IP address of the Managed Media Converter is 192.168.0.100, then the manager PC should be set to 192.168.0.x (where x is a number between 1 and 254, except 100), and the default subnet mask is 255.255.255.0.

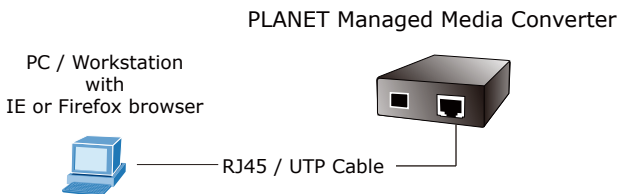


3.1 Logging in to the Managed Media Converter

1. Use Internet Explorer 8.0 or above Web browser to enter the default IP address **https://192.168.0.100** to access the Web interface.
2. When the following login screen appears, please enter the default username **"admin"** and password **"admin"** (or the password you have changed before). Press **"Login"** to enter the main screen of GT-915A. The login screen in Figure 1 appears.

Default IP Address: **192.168.0.100**

Default Account: **admin**

Default Password: **admin**

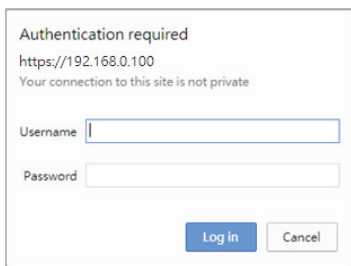

The image shows a web browser dialog box titled "Authentication required" for the URL "https://192.168.0.100". A warning message states "Your connection to this site is not private". Below this, there are two input fields: "Username" and "Password". At the bottom right, there are two buttons: "Log in" (highlighted in blue) and "Cancel".

Figure 1. Web Login Screen of Managed Media Converter

After entering the user name and password, the Web main screen appears as in Figure 2 after the login.



Figure 2. Web Main Screen of Managed Media Converter

The Menu on the top of the Web page lets you access all the commands and statistics the Managed Media Converter provides. The Menu always contains one or more buttons, such as **“System”**, **“Switching”**, **“QoS”**, **“Security”** and **“Maintenance”**.



Figure 3. Main Menu

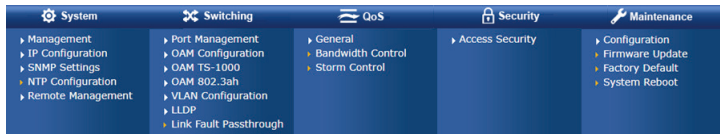


Figure 4. Sub-menu

Now, you can use the Web management interface to continue the Managed Media Converter management. Please refer to the user manual for more.




Note

1. For security reason, please change and memorize the new password after this first setup.
2. Only accept command in lowercase letter under web interface.

3.2 Saving Configuration via Web

To save all applied changes and set the current configuration as a startup configuration, the startup-configuration file will be loaded automatically across a system reboot.

1. Click the Save icon on the top Menu bar.



2. Press the **"Save Configuration"** button.

Save Running Configuration to startup-config

Save Configuration


3. Or the other way to save the setting is to Click **Maintenance, Save Startup Config.**

- Configuration
 - Backup
 - Restore
 - Save
 - Firmware Update
 - Factory Default
 - System Reboot

4. Recovering Back to Default Configuration

IP address has been changed or admin password has been forgotten –

To reset the IP address to the default IP Address “**192.168.0.100**” or reset the login password to default value, press the hardware-based reset button on the front panel for about **10 seconds**. After the device is rebooted, you can log in the management Web interface within the same subnet of 192.168.0.xx.

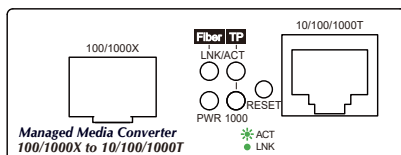

5. Customer Support

Thank you for purchasing PLANET products. You can browse our online FAQ resource and User's Manual on PLANET Web site first to check if it could solve your issue. If you need more support information, please contact PLANET Media Converter support team.

PLANET online FAQs:

<https://www.planet.com.tw/en/support/faq>

Media Converter support team mail address:

support@planet.com.tw

GT-915A User's Manual:

https://www.planet.com.tw/dl/user_manual/gt-915a



(Please select your Media Converter model name from the Product Model drop-down menu.)

Copyright © PLANET Technology Corp. 2022

Contents are subject to revision without prior notice.

PLANET is a registered trademark of PLANET Technology Corp.

All other trademarks belong to their respective owners.